



Insulated sandwich floor panel with expanded polyurethane foam insulated core, density 40 kg/m<sup>3</sup>, thicknesses from 80 to 120 mm or in rock wool upon request. Walking surface with 18 mm waterproof chipboard slab.

## Use



Floor



Fast assembly




Thermal insulation

### Reference dimensions\*:

	Width.	Length.	Thickness.
Standard	1200 mm	3000 mm	80 - 120 mm
Max	6000 mm	3000 mm	80 - 120 mm

\* Size can be customised to prevent cuts and adjustments.

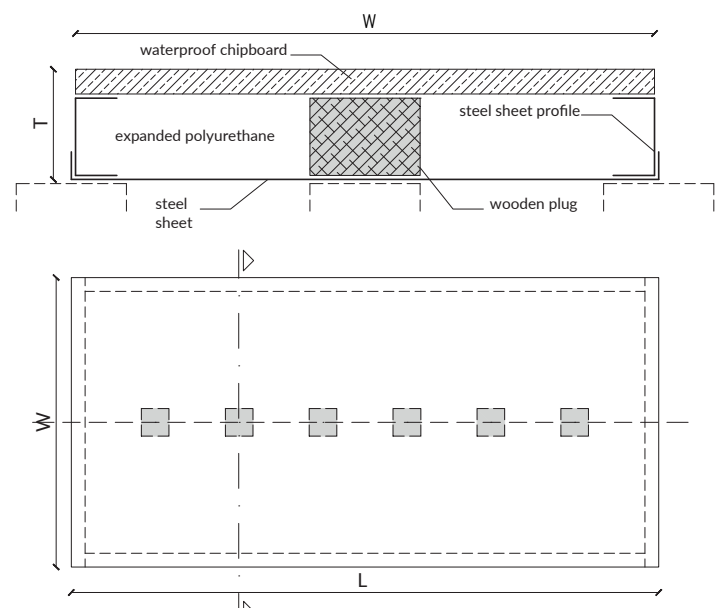

Possibility of adding wooden reinforcement supports, to be customised based on the layout of the supports.

name	panel thickness (mm)	sheet thickness (mm)	CTBH thickness (mm)	internal insulating density	panel weight (Kg/m <sup>2</sup> )	transmittance (W/m <sup>2</sup> K)
Uran Floor 80	80	0.6	18	PUR 40 kg/m <sup>3</sup>	21.22	0.367
Uran Floor 120	120	0.6	18	PUR 40 kg/m <sup>3</sup>	25.13	0.226