

Insulated sandwich floor panel with expanded polyurethane foam insulated core, density 50 kg/m³ or in rock wool, upon request. Walking surface with 16 mm wood-cement slab.

Use and specifications



Floor



Fast assembly




Thermal insulation

Options



Customizable dimension based on support surface.

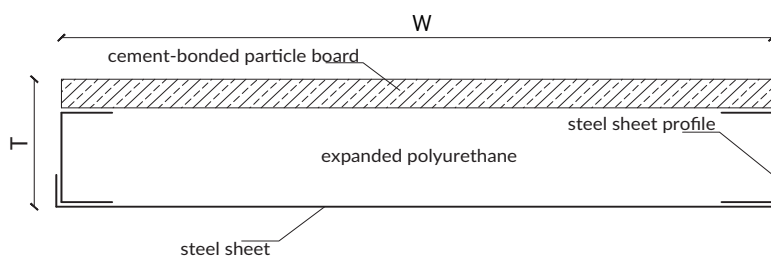

Reference dimensions*:

	Width.	Length.	Thickness.
Standard	1200 mm	3000 mm	56 mm
Max	6000 mm	3000 mm	56 mm

* Size can be customised to prevent cuts and adjustments.

name	panel thickness (mm)	sheet thickness (mm)	wood-cement thickness (mm)	internal insulating density	panel weight (Kg/m ²)	transmittance (W/m ² K)
Uran Floor	56	0.6	16	PUR 50 kg/m ³	28.0	0.57