



Sandwich panels insulated with expanded polystyrene for inexpensive clean rooms, thanks to the simplicity of the products used.

Certifications



CE marking
in accordance with EN 14509

Use and specifications



Laboratories




Fast
assembly



Reduced weight

Technical drawing

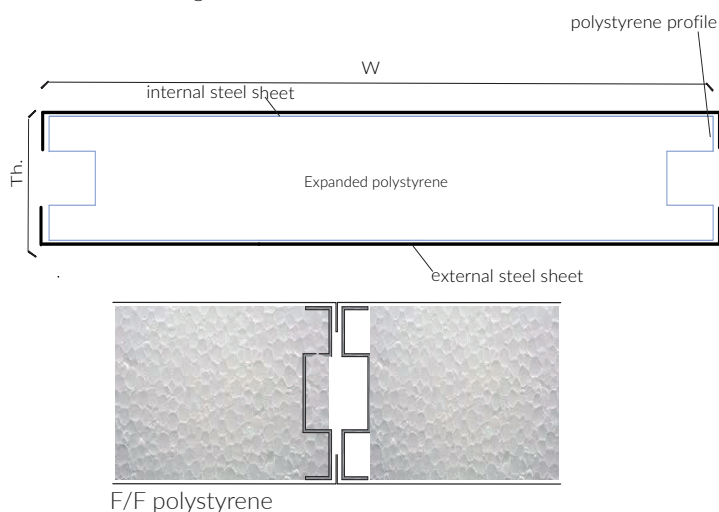

Reference measurements*:

Width.	Length.	Thickness.
1200 mm	max 4000 mm	from 60 mm to 80 mm

* Size can be customized to prevent cuts and adjustments.

name	panel thickness (mm)	nominal sheet thickness		insulated core	panel weight (Kg/m ²)	transmitt. (W/m ² K)
		external (mm)	internal (mm)			
EPS	60	0.6	0.6	Expanded Polystyrene d.25 Kg/m ³	11	0.521
EPS	80	0.6	0.6	Expanded Polystyrene d.25 Kg/m ³	11.5	0.398