

Sandwich panels for the construction of clean rooms with glued aluminum honeycomb internal infill and aluminum perimeter frame. The use of aluminum honeycomb ensures excellent mechanical resistance combined with a light weight. Can be used for internal partitions and false ceilings.

Certifications

A1

Reaction to fire (materials)
A1 Euroclass in compliance with EN 13501-1

Use and specifications



Laboratories



Reduced weight



Fast assembly





Non-combustible



Upon request, internal fitting for technical equipment

Technical drawing

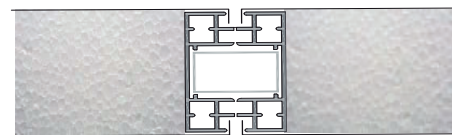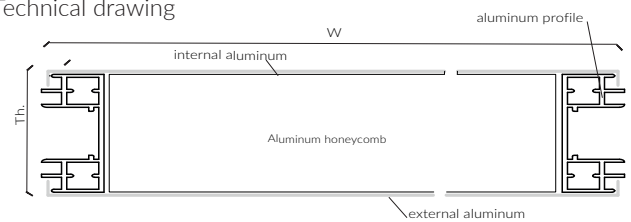

F/F aluminum

Reference measurements*:

Width.	Length.	Thickness.
1200 mm	max 4000 mm	60 mm

* Size can be customized to prevent cuts and adjustments.

name	panel thickness (mm)	nominal sheet thickness		insulated core	panel weight (Kg/m ²)
		external (mm)	internal (mm)		
Pivot AL	60	0.6	0.6	aluminum honeycomb	12.6