

Sandwich panels insulated with glued expanded polystyrene and with aluminum perimeter frame, used to create average/high level clean rooms thanks to the easy cleaning of the walls, the excellent aesthetic finishing and its low cost.

### Certifications

**CE** CE marking  
in accordance with EN 14509

### Use and specifications




Laboratories



Fast assembly



Upon request, internal fitting for technical equipment

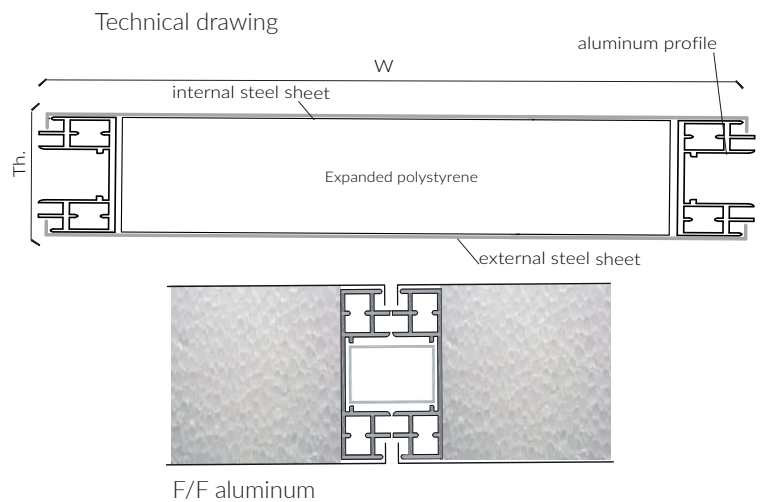

### Reference measurements\*:

Width.	Length.	Thickness.
1200 mm	max 4000 mm	60 mm

\* Size can be customized to prevent cuts and adjustments.

name	panel thickness (mm)	nominal sheet thickness		insulated core	panel weight (Kg/m <sup>2</sup> )	transmittance (W/m <sup>2</sup> K)
		external (mm)	internal (mm)			
Pivot EPS	60	0.6	0.6	expanded polystyrene 15 kg/m <sup>3</sup>	12.10	0.579
Pivot EPS	60	0.6	0.6	expanded polystyrene 25 kg/m	12.70	0.521