



Sandwich panels insulated with glued mineral wool, with aluminium perimeter frame used for the creation of clean rooms. The junction system with an aluminium profile always ensures perfect and aligned assembly of the walls. The use of mineral wool ensures excellent reaction to fire.

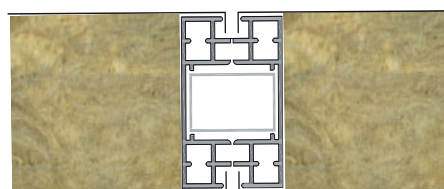

F/F aluminium

Certifications

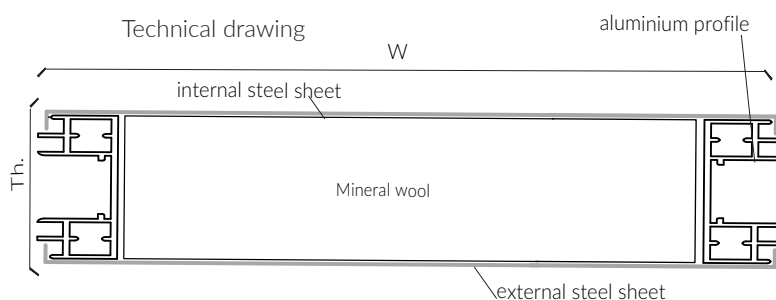

CE marking
in accordance with EN 14509



Reaction to fire (materials)
A1 Euroclass in compliance
with EN 13501-1

Use and specifications



Laboratories



Non-combustible



Fast
assembly



Thermal
insulation



Upon request, internal fitting for
technical equipment

Reference measurements*:

Width.	Length.	Thickness.
1200 mm	max 6000 mm	from 60 mm

* Size can be customised to prevent cuts and adjustments.

name	panel thickness (mm)	nominal sheet thickness		insulated core	panel weight (Kg/m ²)	transmittance (W/m ² K)
		external (mm)	internal (mm)			
Pivot LR	60	0.6	0.6	mineral wool 100 Kg/m ³	17.20	0.621