

Sandwich panels insulated with polyurethane foam, with aluminium perimeter frame. The junction system with an aluminium profile always ensures perfect alignment to walls. The use of polyurethane foam ensures excellent mechanical strength.

Certifications



CE marking
in accordance with EN 14509

Use and specifications



Laboratories




Thermal
insulation



Fast
assembly



Upon request, internal fitting for
technical equipment

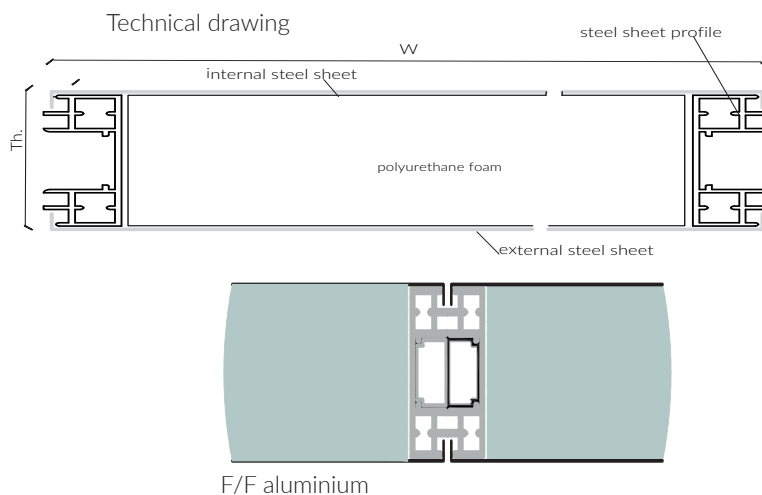

Reference measurements*:

Width.	Length.	Thickness.
1200 mm	max 6000 mm	from 60 mm

* Size can be customised to prevent cuts and adjustments.

name	panel thickness (mm)	nominal sheet thickness		insulated core	panel weight (Kg/m ²)	transmitt. (W/m ² K)
		external (mm)	internal (mm)			
Pivot PU	60	0.6	0.6	polyurethane	13.7	0.373