

Sandwich panels insulated with glued expanded polystyrene and with aluminium perimeter frame, used to create average/high level clean rooms thanks to the easy cleaning of the walls, the excellent aesthetic finishing and its low cost.

Certifications

CE marking
in accordance with EN 14509

Use and specifications




Laboratories



Fast assembly



Upon request, internal fitting for technical equipment

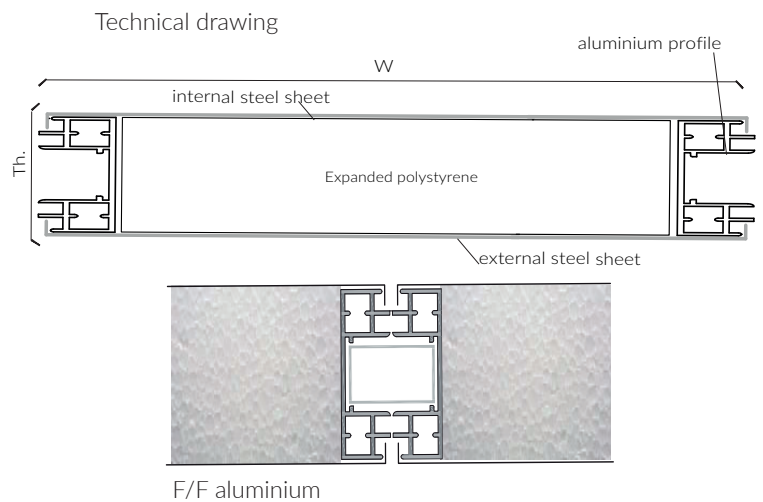

Reference measurements*:

Width.	Length.	Thickness.
1200 mm	max 4000 mm	60 mm

* Size can be customised to prevent cuts and adjustments.

name	panel thickness (mm)	nominal sheet thickness		insulated core	panel weight (Kg/m ²)	transmittance (W/m ² K)
		external (mm)	internal (mm)			
Pivot EPS	60	0.6	0.6	expanded polystyrene 15 kg/m ³	12.10	0.579
Pivot EPS	60	0.6	0.6	expanded polystyrene 25 kg/m ³	12.70	0.521