



Panel in mineral wool, black tissue and perimeter profile in steel. Acoustic lamella are designed to achieve good aerodynamic performance and an efficient reduction of loud noise, while allowing air flow passage. Their ideal use is in the insulation of generators, machinery, air conditioners and refrigeration systems.

### Certifications

#### Use and specifications




Acoustic comfort



Fast assembly

name	core	thick. (mm)	weight (kg/m <sup>2</sup> )
SL50	mineral wool	50	5.2
SL80	mineral wool	80	7.7
SL100	mineral wool	100	9.4
SL150	mineral wool	150	13.7
SL200	mineral wool	200	18.0

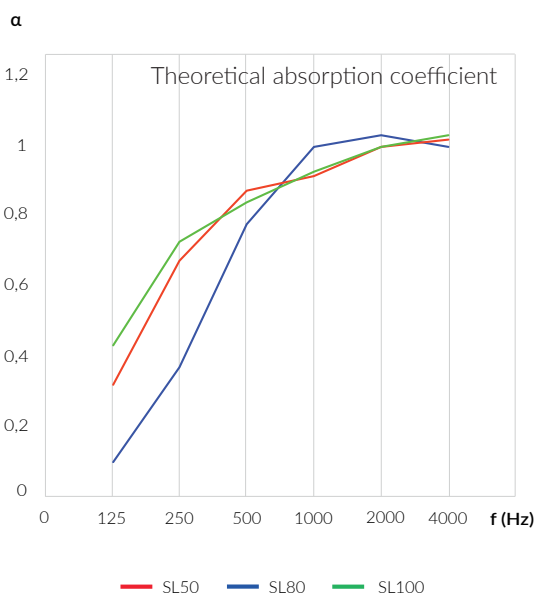

#### Reference measurements\*:

Width.	Length.	Thickness.
width from 600 mm to 1200 mm	up to 2000	from 50 mm to 200 mm

\* Size can be customized to prevent cuts and adjustments.