serrall
uraniagroup

Serrall Modular
Alu WTB 75 | hopper window

Advance Line

Vasistas window system, in aluminum with thermal break, with handle closing system.

Configurations

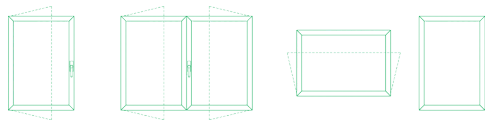

Technical features

- Thermal Break Aluminum Extruded Profiles
- Construction depth of frame 75 mm
- Construction depth of leaf 85 mm
- EPDM tightness packing (DIN 6873)
- Glass thickness up to 52 mm
- Simply-Smart system
- It can be installed on panels of any thickness through the usage of adaptable counter-frames systems.

CE **Marchio CE**
in accordance with UNI EN 14351-1

Performance*

4 — **Air permeability**
Class 4 in accordance with UNI EN 12207

B4 — **Wind load resistance**
Class B4 in accordance with UNI EN 12211

U_w 1,2 — **Thermal insulation**
U_w = 1,2 W/m²K (Ug = 1 W/m²K with warm edge space ref. dim. 1230 x 1480 mm) in accordance with UNI EN 10077-1

E750 — **Watertight seal**
Class E750 in accordance with UNI EN 12208

*Values are obtained on a window / door with dim. ref. 1230 x 1480 mm
*All the values reported are from a notified body

Intended use

- Healthcare Buildings
- Educational Buildings
- Business Buildings
- Commercial Buildings
- Industrial Buildings
- Residential Buildings

Options

- Different RAL paint coating
- Tilting-wing opening system
- Rolling shutter in PVC or aluminium
- Shatter-proof glass
- Thermally insulated shutter housing
- Black-out curtain Fly screen
- Coiler box, gear or motor rolling control
- Protective and/or ventilation grating

serrall.com
Indirizzo: Via A. M. Mozzoni 10 Corciano (PG) Italia 06073 - Tel: +39 (075) 69 70 91 - email: info@serrall.com